

Dukkaboard®

Product Details

Dukkaboard Adjustable Outlet Trap



The Knowledge Network



Data-Sheet

Dukkaboard Adjustable Trap

Description:

Comprises 50mm waterseal for compliance to regulations for new-build installations.

Shallow drain to suit connection to any square-drain tray from the Dukkaboard range.

Made from high quality ABS. Spin-welded components guarantee quality of manufacture every time. Connect to 2" pipe via multifit coupling.

Lifetime rubber seals don't break down over time with temperature fluctuations.

Complete with 2 x drain cover riser frame, 140x140mm pressed stainless-steel cover.

Product Features:

- Incorporates 45° bend on outlet, to give flexibility of orientation.
- Offset of 101mm from centre line of trap body.

- Trap body circular which gives scope to rotate through 360° for flexibility

Installation:

Check for damage before use, and clean rubber seal from any dust or contaminants. A simple wipe with a cloth is generally sufficient.

High quality rubber seal requires no silicone. DO NOT USE silicone sealant in place of, nor in combination with, the rubber seal.

Tighten hand tight with the collar key provided, no need to use levers or glue.

Water test below-floor joints before final installation of the tray to ensure standards of workmanship.

Flow Rate:

Flow rate 50LPM. Flow rate of the tap should comfortably exceed expected max output of any water supplies draining the shower tray (aggregate

flow rates should be considered where multiple shower heads can be run concurrently).

Factors that may adversely affect this figure are:


- 1) Blockage or partial blockage in the waste pipe.
- 2) Incorrect fall on the waste pipe – it should be a minimum 18mm in 1m according to BS EN 12056-2:2000.
- 3) Lots of bends in the waste run will slow down flow.
- 4) Incorrectly vented waste plumbing system

Recycling at end of service:

Product is largely composed of recyclable ABS plastic, recycle at plastic recycling facilities, or dispose of with normal rubble / household waste. Inert during and after use.

Data-Sheet

Dukkaboard Adjustable Trap Dimensions

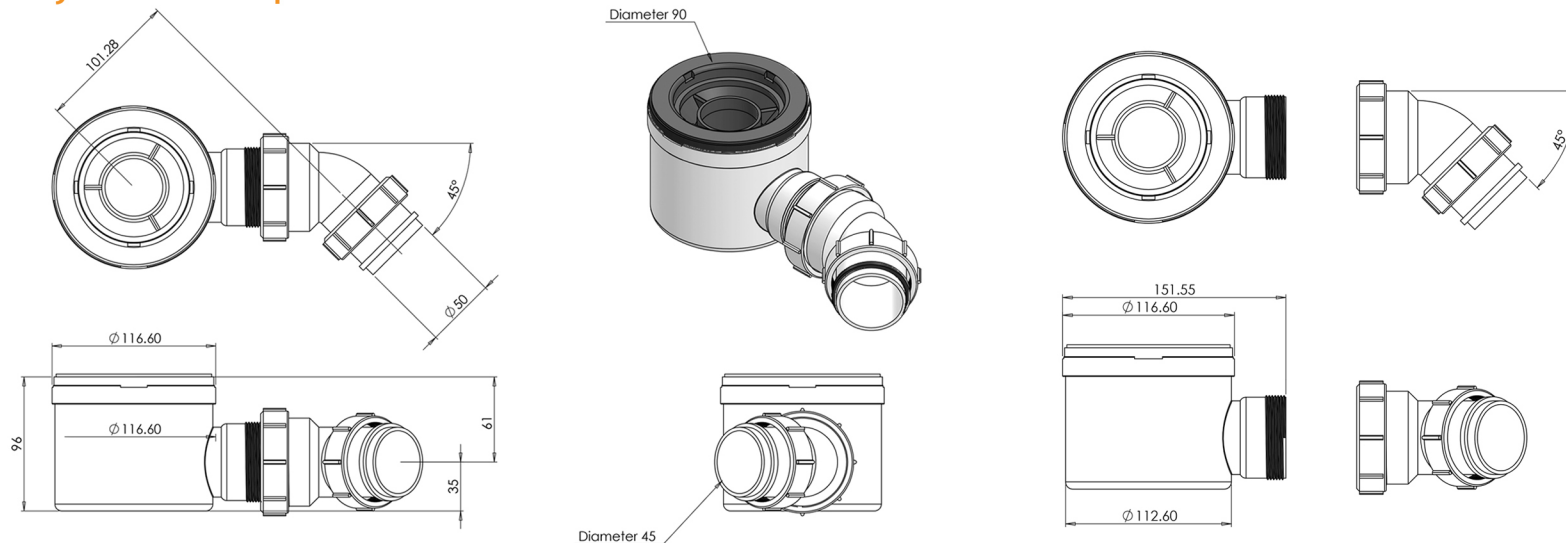

Dimensions:

Overall body dia 117mm
Connection to shower tray – 90mm dia opening
Waste pipe multifit connection to suit BS 2"
Outlet centre 61mm below shower tray surface

Operation and Maintenance:

Gently brushing with regular mild household cleaners will remove most deposits and discolouration. Remove drain cover to access removable trap components for periodic cleaning of grime and built-up residue. Separate the funnel and the bucket from each other and empty residual matter into a bin or the WC pan. Mechanical drain rodding of pipework is possible while the funnel and bucket components are removed. Ensure these are seated home firmly again once cleaning maintenance is complete. Do not use caustic drain cleaner.

Accessories also available (separately):

Drain cover riser frame, DS-GA-0010 (for further extension of cover height in increments of 6mm)
Stainless-steel quadra laser-cut cover, DS-SG-0030, to add a touch of finesse
Stainless-steel surround frame DS-GA-0020, to complement the stainless-steel quadra laser-cut cover
Please enquire with your bathroom supplier (all accessories available separately).