

Dukkaboard®



The Knowledge Network

Product Details

Dukkaboard Channel L-Drain - Inline Outlet



Data-Sheet

Dukkaboard Channel L-Drain - Inline Outlet

Description:

The Dukkaboard Channel L-Drain Inline Outlet has a modern and discrete design, giving a seamless tiled floor finish.

Designed to be installed against the wall between structural joists or elsewhere in the room, in conjunction with Dukkaboard Shower-Trays on concrete floors, the Dukkaboard Channel L-Drain Inline Outlet is perfect for today's modern construction methods.

A key feature of the Dukkaboard Channel L-Drain Inline Outlet is its integrated bonded waterproofing flange, ensuring guaranteed integration with substrate waterproofing layers.

It has a lifetime guarantee and has been granted BBA approval.

Product Features:

- Overall Height: 120mm
- Overall Length: 970mm
- Outlet dimension: 50mm (Horizontal)
- BBA approved
- Lifetime Guarantee
- Waterless trap
- Easy to clean and replace trap

Waterless Trap:

The waterless trap has been specially designed with a spring loaded mechanism which keeps the trap sealed when not in use and gives twice the protection against backwater and odours.

This ensures that when used in environments with low water consumption or when the drain is left unused for prolonged periods the trap cannot dry out, making it ideal for situations where the shower is not in

everyday use.

Flow Rate:

1.0l/s according to SS EN1253.

Grill Length:

All Dukkaboard L-Drains are manufactured with one body size at 611mm, all lengths of grill are then fitted onto this body.

Bespoke grills can be manufactured for sizes in between and over those that are standard.

Available Sizes:

The Dukkaboard L-Drain Inline Outlet is available in six standard sizes:

- 600mm
- 700mm
- 800mm
- 900mm
- 1000mm
- 1200mm

Data-Sheet

Dukkaboard Channel L-Drain - Inline Outlet

Material:

The Dukkaboard Channel L-Drain Inline Outlet body and outlet is manufactured from polypropylene plastic.

The grill is manufactured from stainless steel, ensuring a high quality finish.

Loading Class:

Meets the requirements for loading strength class K3.

Intended Use:

Floor drain intended for waste water and for installation in timber or concrete floor constructions with surface of ceramic or porcelain tiles.

Disposal:

Can be disposed of as building rubble.

Storage Info:


Store at room temperature and protect from sunlight and moisture.

Also see:

Installation Instructions and Flow Rate Chart.


Data-Sheet

Dukkaboard Channel L-Drain - Inline Outlet

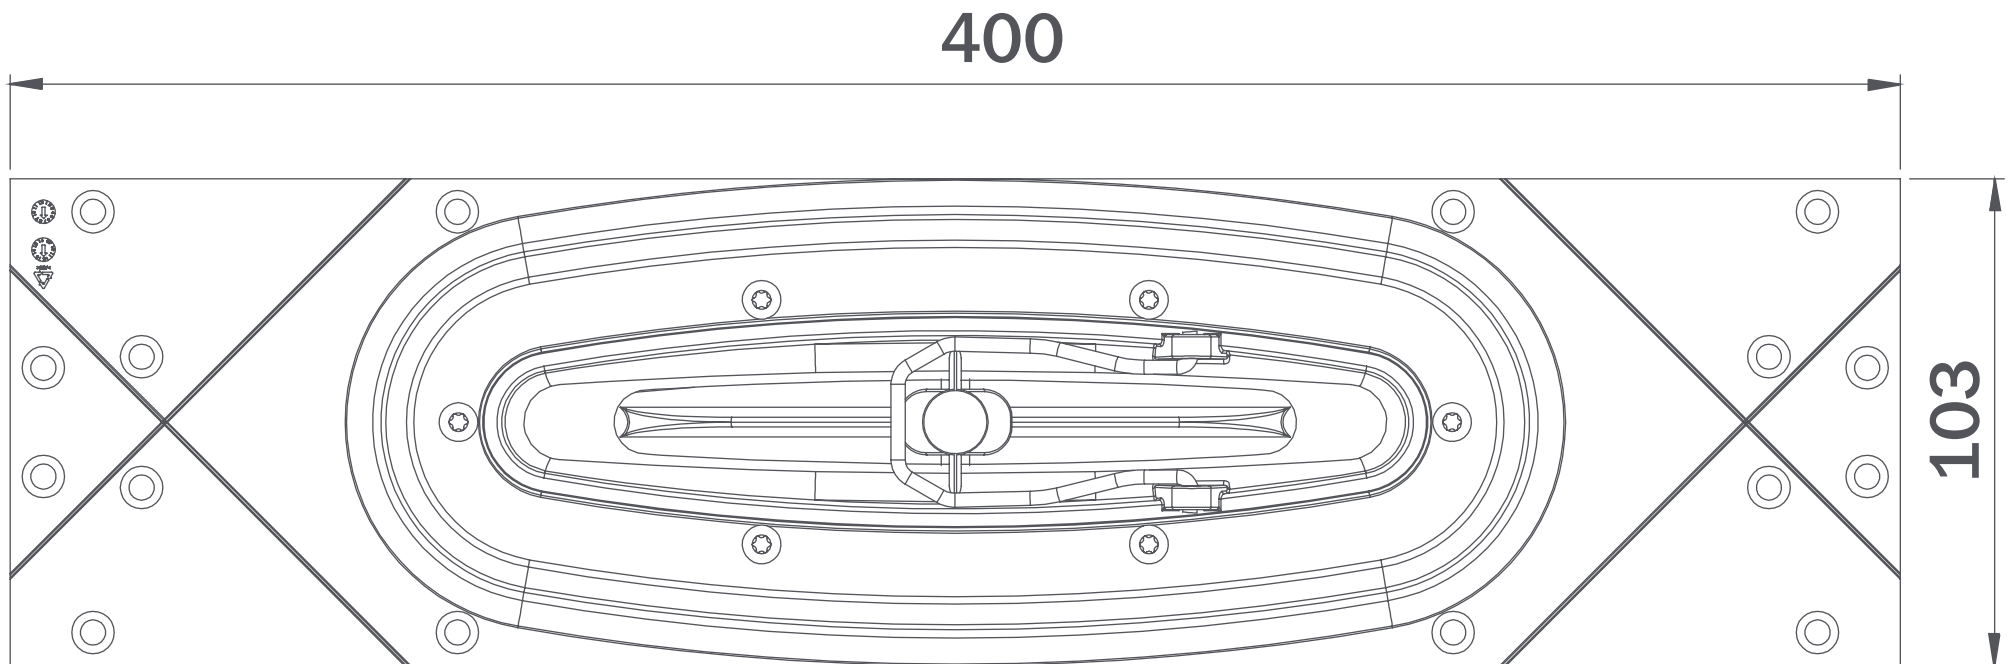

Data-Sheet

Dukkaboard Channel L-Drain - Inline Outlet

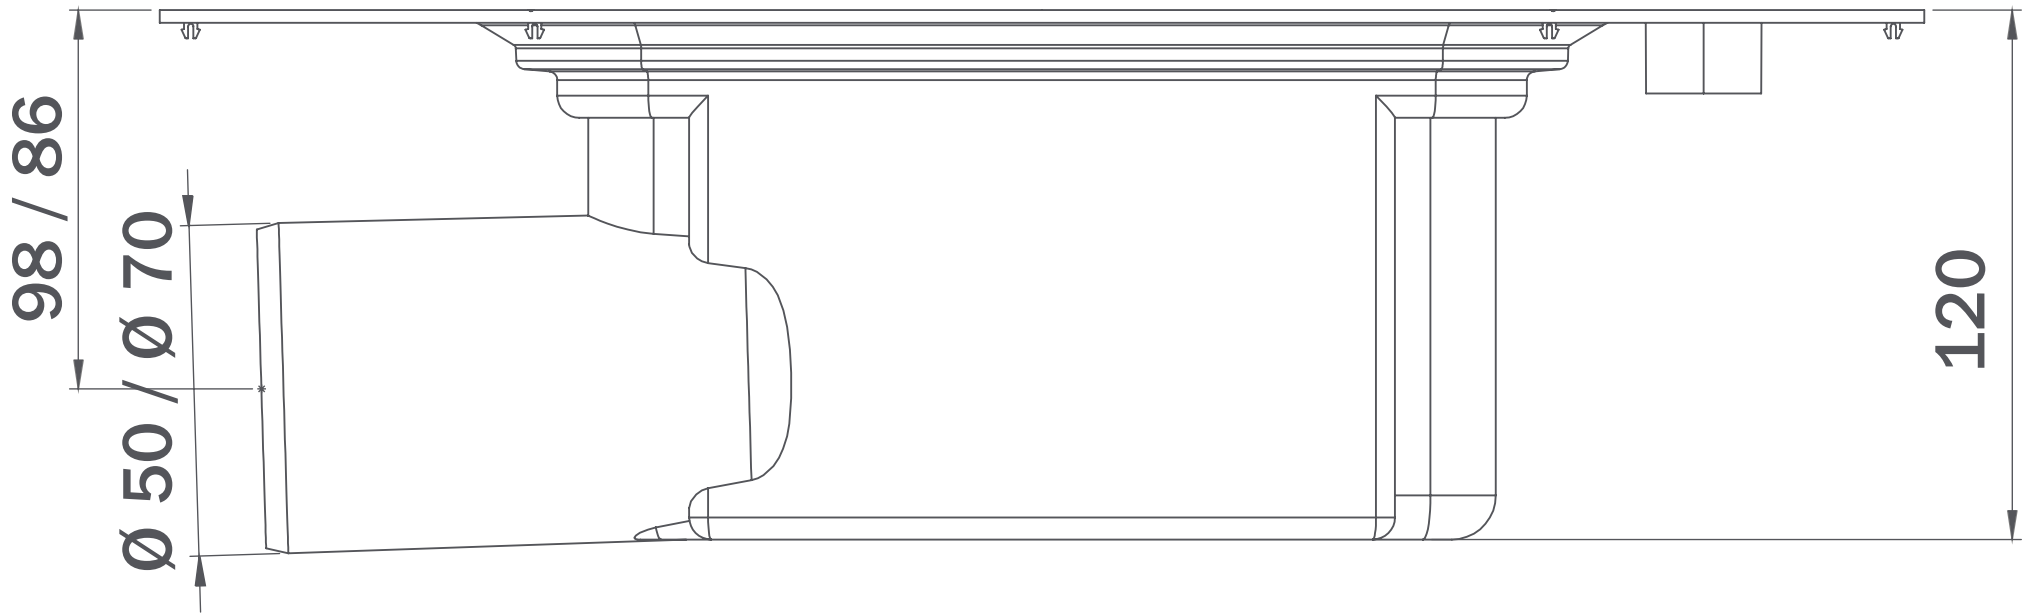

Dukkaboard®



The Knowledge Network

Specification Details

Confidence through Quality

Trusted by professionals across the globe, Dukkaboard is the preferred choice for architects and contractors.

To underline the supreme quality of the Dukkaboard range, Dukkaboard products come with a 25 year warranty against any defects in material on all system installations that have been carried out in accordance with the Dukkaboard installation guidelines*.

* Request Dukkaboard warranty document for more details.

